

微型交流减速电机

6RK 交流减速电机 (100W)(100mm)




电机特性表 Specifications of Motor

电机类型	电机型号	功率	频率	电压	转速	启动转矩	额定	额定转速	额定电流	绝缘等级	防护等级	轴承	齿轮型号
可逆电机 Reversible motor	6RK120A-A	120	50	110	240	6000	3000	1300	35	IP54	6014	6.3:110x	
	6RK120GU-A	120	60	110	220	7900	7550	1550	50	IP54	6014	6.3:110x	
	6RK120A-C	120	50	220	1700	6000	4000	1300	35	IP54	6014	6.3:110x	
	6RK120GU-C	120	60	220	1700	7900	7550	1550	7	IP54	6014	6.3:110x	
	6RK140A-A	140	50	110	280	11000	10500	1300	40	IP54	6014	6.3:110x	
	6RK140GU-A	140	60	110	280	11000	10500	1300	40	IP54	6014	6.3:110x	

外形尺寸 Outline Dimension



电机型号	减速比 Reduction Ratio	L1 mm	L2 mm	L3 mm	H mm
6IK(RK)140A(GU)	1:3~1:300	142	65	207	10
6IK(RK)140A(GU)	1:3~1:300	142	65	207	10

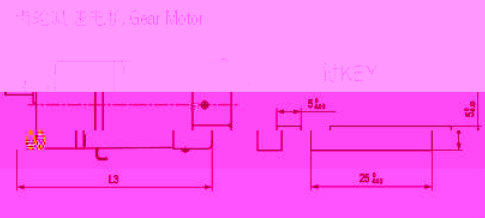

扭矩表 Torque Table (Kg-cm)

(kg-cm × 9.80665 = N-cm)

电机型号	额定扭矩	启动扭矩	最大扭矩
6RK120A-A	1.2	1.8	2.4
6RK120GU-A	1.2	1.8	2.4
6RK120A-C	1.2	1.8	2.4
6RK120GU-C	1.2	1.8	2.4
6RK140A-A	1.4	2.1	2.8
6RK140GU-A	1.4	2.1	2.8